


Extensions BM55+56-E

spectro lab



Extensions BM55-E

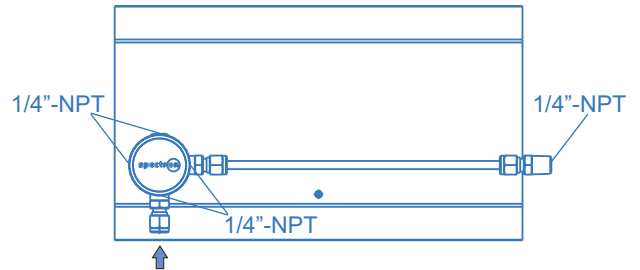

Product features

- Extension modules for pressure control panels Spectrolab BM55 and BM56 series
- For non-corrosive gases up to quality 6.0
- Laboratory-style design
- Designed for easy installation
- With filter at the inlet of the individual extension modules

Technical data

Inlet pressure P_1 max. 300 bar

Materials


Manifold body: chrome-plated brass
Filter: Sintered SS 316L

Inlet connection SS compression ring fitting 6x1 mm


Temperature range -30°C to +60°C

Weight approx. 1 kg per side


Extensions right and left for pressure control panels BM55 and BM56 with **connection block**:

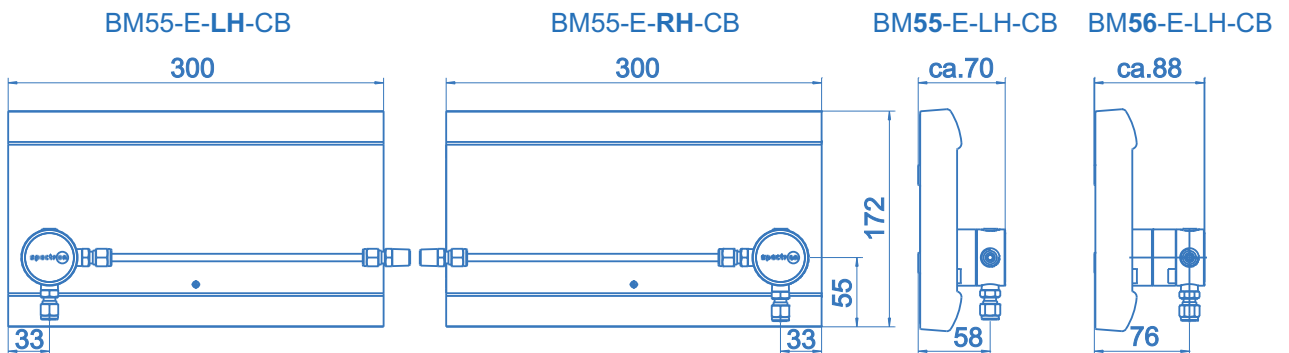

Extensions right and left for pressure control panels BM55 and BM56 with **valve**:

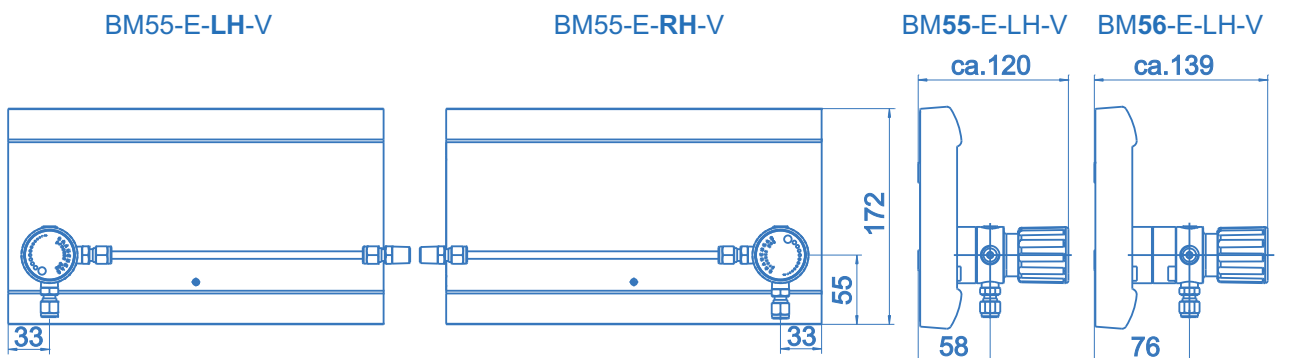

Extension modules completely assembled
 Example: pressure control panel BM55-2
 with BM55-E-LH-CB and BM55-E-RH-CB

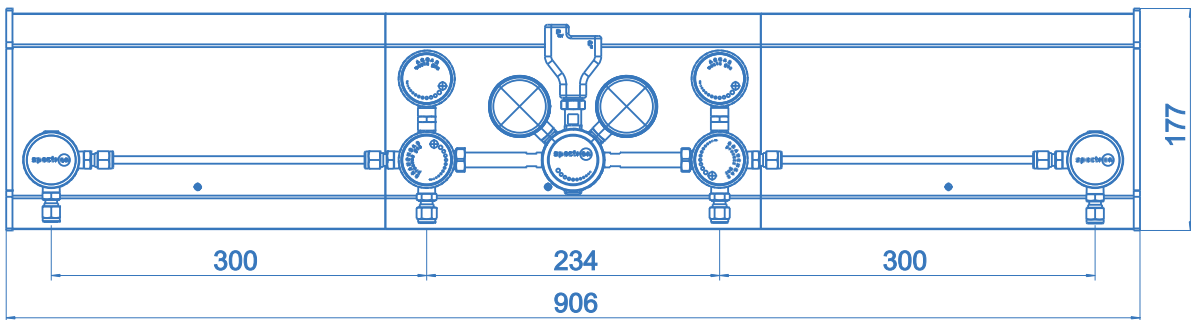

Ordering information:
 Extensions BM55+56-E

BM55 - E - LH - CB

Type

55 - single-stage pressure control panel BM55 or BM56-2U
 56 - double-stage pressure control panel BM56-1 and BM56-2

Side

RH - right
 LH - left

Inlet

CB - connection block
 V - valve (manual)
 VP - pneumatic-valve

Specifications

- SPECTROLAB - components guarantee maximum quality by using high grade materials and a quality assurance program acc. to ISO 9001.
- All components which come into contact with the medium are cleaned in an ultrasonic cleaning system (CFC-free) with the special cleaning process SPECTRO-CLEAN® and are then baked out.
- SPECTROLAB - components undergo a 100% Helium-leak-test.

Important note regarding component selection

- In order to assure safe operation it is essential to take the configuration of the whole system into account when selecting system components.
- The function of the components, the compatibility of the materials, correlating temperature ranges, correct installation, operation and maintenance in accordance with the relevant regulations are the responsibility of the system designer and the user.